


EXTERIOR ELEVATIONS

1/4" = 1'-0"

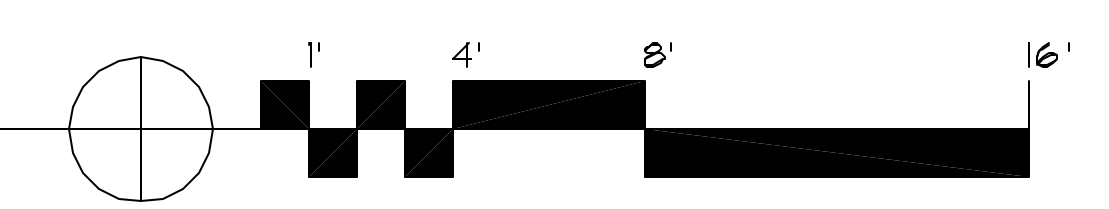

LEXICON:

- LINE OF SUB FLOOR BEYOND
- LINE OF FOUNDATION BELOW GRADE
- SIMULATED STONE CLADDING - INSTALL PER MANUFACTURERS SPECIFICATIONS.
- CEDAR SHINGLE SIDING WITH 6 INCH REVEAL. PRIME AND PAINT.
- HORIZONTAL LAP SIDING - VERIFY EXPOSURE - REVIEW WITH OWNER. PRIME AND PAINT.
- ASPHALT COMPOSITION ROOFING - SEE ROOF PLAN FOR NOTES
- DOOR KEY (REFER TO DOOR SCHEDULE)
- WINDOW KEY (REFER TO WINDOW SCHEDULE)
- KEY NOTE (REFER TO KEY NOTES)
- T.G. TEMPERED SAFETY GLAZING
- EGRESS INDICATES WINDOWS OR DOORS TO BE USED AS EMERGENCY EXITS - SEE EGRESS NOTES ON SHEET A102

KEY NOTES:

- 1 36 INCH HIGH GUARD RAIL - SEE SHEET A102 FOR GUARD RAIL NOTE.
- 2 HAND RAIL - SEE SHEET A102 FOR HAND RAIL NOTE.
- 3 CONTINUOUS RIDGE VENT - DETAIL E/A801
- 4 EAVE VENT WITH SCREEN - SEE DETAIL F/A801
- 5 CONTINUOUS EAVE FLASHING
- 6 EXHAUST VENT CAP
- 7 PLUMBING VENT
- 8 HEAD FLASHING WITH DRIP EDGE AT FRONT AND SIDES OF HEAD TRIM - LAP 4" UP WALL MINIMUM
- 9 VENTED TRANSITION FLASHING - LAP EACH SIDE OF ROOF 4 INCHES MINIMUM - SEE DETAIL G/A801 (FOR VENTED LOCATIONS SEE ROOF PLAN)
- 10 FREE FINISHED ALUMINUM GUTTER.
- 11 FREE FINISHED ROUND ALUMINUM DOWN SPOUT - TIE INTO APPROVED STORM DRAIN SYSTEM
- 12 SMOOTH 5/4 INCH EXTERIOR WOOD TRIM, PRIME AND PAINT.
- 13 SMOOTH 3/4 INCH EXTERIOR WOOD TRIM, PRIME AND PAINT.
- 14 SMOOTH 5/4x6 INCH EXTERIOR WOOD FACIA, PRIME AND PAINT
- 15 SMOOTH 5/4x8 INCH EXTERIOR WOOD FACIA, PRIME AND PAINT
- 16 SMOOTH 5/4x10 INCH EXTERIOR WOOD FACIA, PRIME AND PAINT
- 17 2x CEDAR GILL TRIM WITH DRIP EDGE
- 18 3x10 CLEAR ARCHITECTURAL (NON-STRUCTURAL) OUT-RIGGER WITH CAP FLASHING. USE HUGO10 CONCEALED FLANGE HANGER @ WALL & A35 CLIP @ FACIA TO SECURE OUTRIGGER. PROVIDE SOLID 2x BLOCKING AT ALL ATTACHMENT POINTS. TYPICAL @ ALL OUTRIGGER LOCATIONS
- 19 LINE OF CONCRETE FOUNDATION - SEE STRUCTURAL.
- 20 NEW DIRECT VENT GAS FIREPLACE EXHAUST CAP.

NOTES:


- 1) VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION. NOTIFY ARCHITECT OF ANY DISCREPANCIES IMMEDIATELY.
- 2) SEE A200 SHEETS FOR FLOOR PLANS AND ROOF PLAN.
- 3) SEE A200 SHEETS FOR DOOR & WINDOW SCHEDULE.
- 4) ALL EXTERIOR WOOD SIDING AND WOOD TRIM SHALL BE APPROVED FOR EXTERIOR USE BY THE SUPPLIER OR MANUFACTURER.
- 5) EXTERIOR SIDING AND SIDING INSTALLATION SHALL CONFORM TO 2006 IRC SECTION R103 EXTERIOR COVERING.
- 6) EXTERIOR FLASHING SHALL BE APPROVED BY ARCHITECT PRIOR TO INSTALLATION. GENERAL CONTRACTOR TO REVIEW WITH ARCHITECT LOCATIONS OF FLASHING PRIOR TO INSTALLATION.
- 7) REPETITIVE ITEMS MAY BE NOTED ONLY ONCE BUT SHALL BE PROVIDED IN FULL PER NOTE IN ALL AREAS INDICATED BY DRAWING.



1837 BALLARD WAY SEATTLE WA 98107
WHITNEYARCHITECTURE.COM
206.789.3994 FAX.789.1871

PROJECT:
Thorpe Residence

1 A New Single-Family Residence
6004 125th Avenue Northeast
Kirkland, WA 98033

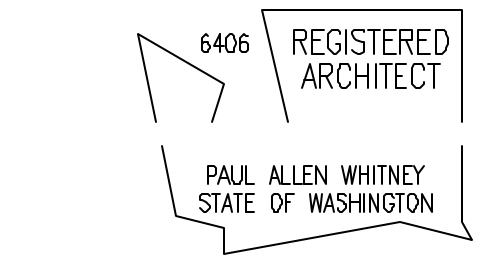

DATE ISSUED:
12/19/2007 PERMIT SET

DATE REVISED:
03/20/2008 1 CORRECTIONS

FILENAME & LOCATION:
A3.ELE.SECT.dwg
Z:\DATA\DRAWINGS\WHITNEY\Thorpe\A3 - elevations & sections\

PLOTTED:
25 March 2008 at 1:26 pm

SHEET TITLE:
**Permit Documents
Exterior Elevations**

SHEET NUMBER:

A3.02
SHEET OF